




OUTSIDE CURVE

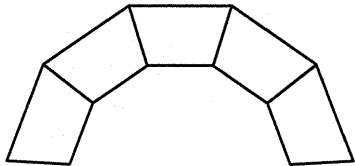


INSIDE CURVE

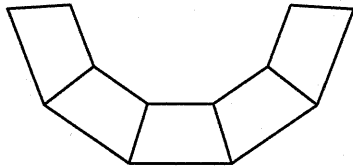


SAW CUT AS
REQUIRED TO
CONSTRUCT
90 DEGREE
MITERED
CORNER



TOP



SPLIT FACE AND END

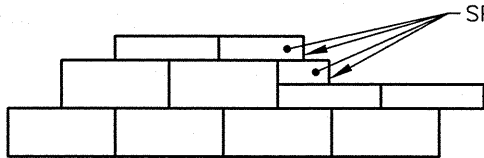

WALL FACE

1. ALWAYS START CAPPING WALL FROM THE LOWEST ELEVATION.
2. LAYOUT CAPS PRIOR TO USING ADHESIVE.
3. CUT CAPS TO FIT. VARIOUS COMBINATIONS OF LONG AND SHORT CAP FACES WILL BE NECESSARY FOR RADII GREATER THAN THE MINIMUM.
4. ALTERNATE SHORT AND LONG CAP FACES EVERY OTHER CAP TO ACHIEVE A STRAIGHT ROW OF CAPS.
5. USE EXTERIOR-GRADE CONSTRUCTION ADHESIVE TO SECURE CAPS.
6. REFER TO DETAIL X ON SHEET WX FOR ADDITIONAL INFORMATION.

ANCHOR DIAMOND PRO™
X CAP BLOCK DESIGN DETAILS
WX (NOT TO SCALE)



These graphical representations are intended for preliminary design purposes only, and are not to be used for construction without the signature of a registered professional engineer.

All information herein © 2005 Anchor Wall Systems

Drawn By: AWS
 Date: 4/26/2005
 Scale: NTS

Drawing Title: ANCHOR DIAMOND PRO CAP BLOCK DETAILS
 Project Information: ANCHOR RETAINING WALL SYSTEMS TYPICAL WALL DETAILS