



PLACE ADDITIONAL REINFORCEMENT ON THE NEXT COURSE OF SEGMENTAL UNITS IMMEDIATELY ABOVE THE SPECIFIED PLACEMENT ELEVATION IN A MANNER THAT ELIMINATED GAPS LEFT BY THE PREVIOUS LAYER OF GEOSYNTHETIC AT THE SPECIFIED REINFORCEMENT ELEVATION.

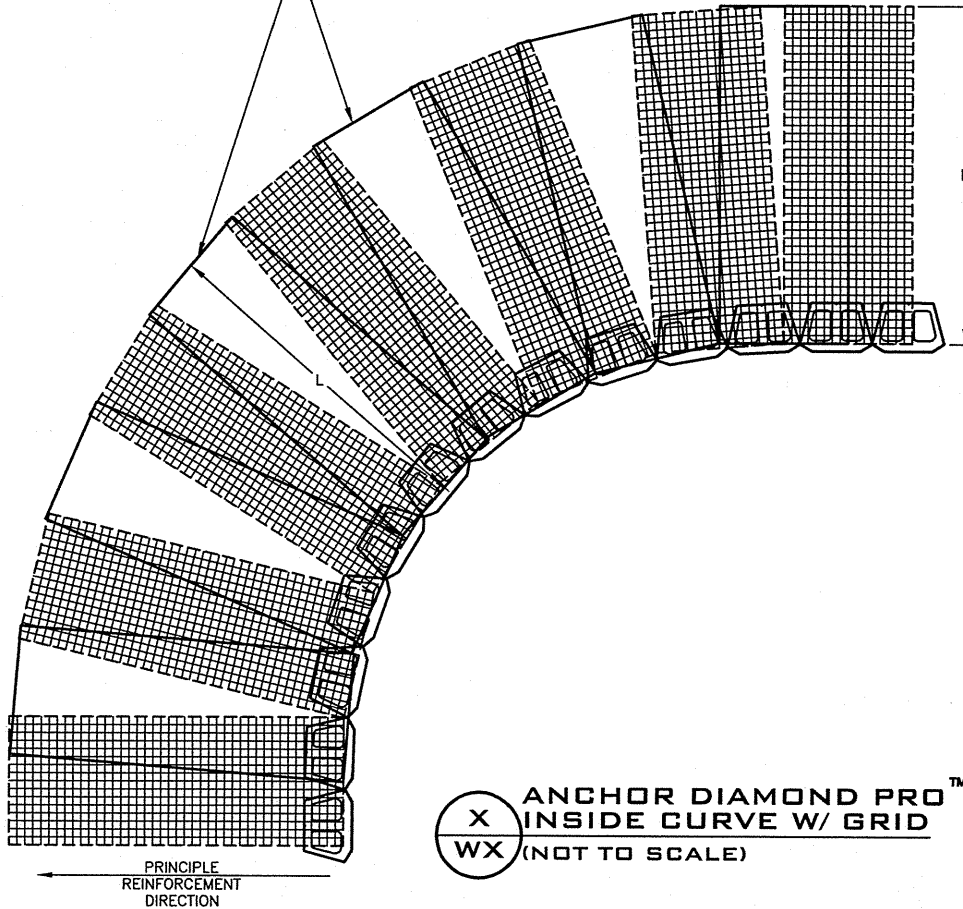


ANCHOR DIAMOND PRO™
X
INSIDE CURVE W/ GRID
WX (NOT TO SCALE)

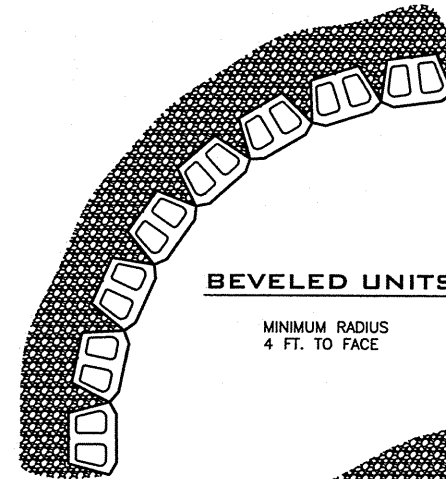

BEVELED UNITS

MINIMUM RADIUS
 4 FT. TO FACE

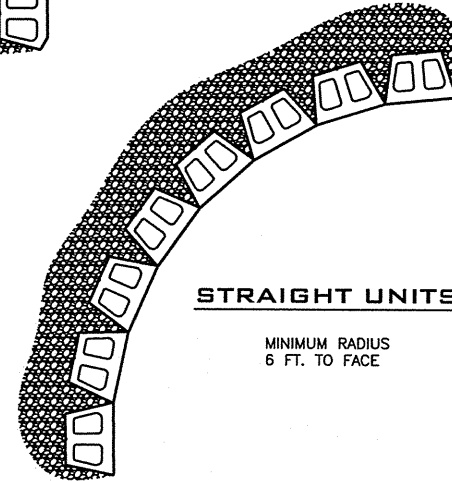

STRAIGHT UNITS

MINIMUM RADIUS
 6 FT. TO FACE

ANCHOR DIAMOND PRO™
X
INSIDE CURVE
WX (SCALE: 1/4"=1'-0")



These graphical representations are intended for preliminary design purposes only, and are not to be used for construction without the signature of a registered professional engineer.

All information herein © 2005 Anchor Wall Systems

Drawn By: AWS
 Date: 4/26/2005
 Scale: AS SHOWN

Drawing Title: **ANCHOR DIAMOND PRO INSIDE CURVE DETAILS**
 Project Information: ANCHOR RETAINING WALL SYSTEMS TYPICAL WALL DETAILS